

DURLON[®] CFG

Corrugated Flexible Graphite




Durlon[®] CFG will maintain a tight seal in a wide range of initial seating stresses making it the universal replacement for spiral wound, double jacketed and traditional flexible graphite gaskets.

Suitable for virtually all applications found in the following industries:

Refining • Chemical • Petro Chemical • Pulp & Paper
Power Generation • Steel Mill

SIZES & TYPES:

- Standard ANSI Class 150 and 300 Ring and Full Face: ½" – 24"
- Non Standard MSS SP-44 & API 605: 26" – 96"
- Non Standard Ovals: Handhole and Manway Gaskets
- All Heat Exchanger Styles
- Different metals available to match flange metallurgy, temperature, or chemical.

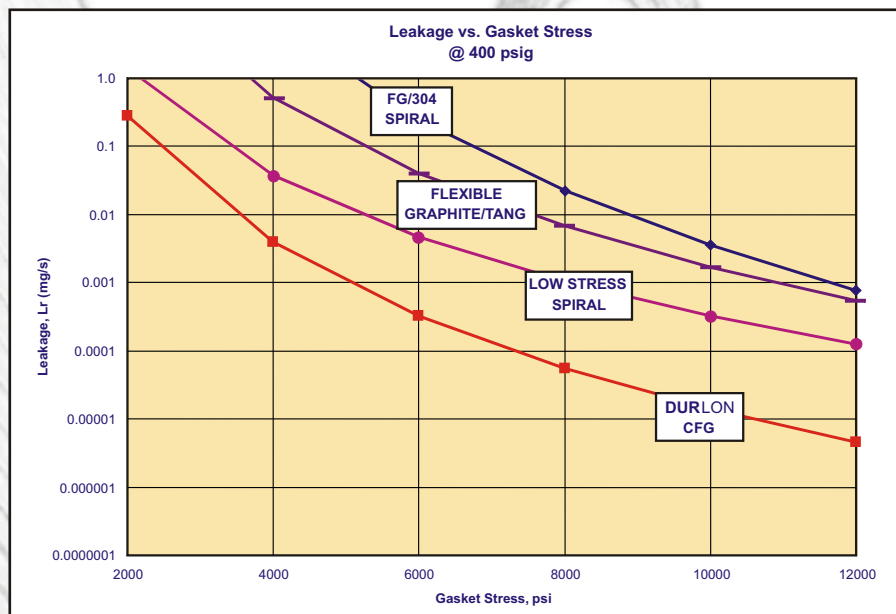

Proprietary corrugation design provides superior sealing and recovery characteristics at lower required bolt loads than spiral wound gaskets. Problems commonly associated with over-stressing the flange assembly are eliminated.



280 Boot Road, Downingtown, PA 19335
T: 610.363.5800 · 866.707.7300
F: 610.363.5881
www.gasketresources.com

ADVANTAGES



FIRE SAFE

Passed the modified
API 607 fire test

Blow Out Resistant

- Metal core counteracts internal pressure spikes

High Spring Back

- Excellent recovery in thermal cycling and severe vibration services
- Stable leakage control with minimal force

Superior Emissions Control

- DIN 3535 gas permeability/leakage: <0.01 cc/min

Seals Imperfect Flanges

- Flexible graphite fills in small voids

No Inward Buckling

- Corrugations force the flexible graphite up to the seating surface
- No expensive inner rings required

Seats On a Variety of Surface Finishes

- 60 to 750 rms

Easy & Safe to Handle, Install and Remove

- Will not cut skin
- Large gaskets easily install, will not collapse, fold or unwind
- Upon replacement, cleaning flange serrations is unnecessary

One Thickness for All Applications


- Reduce gasket inventory
- Standardize installation procedures

SPECIFICATIONS:

Temperature, Min	-328°F (-200°C)	PVRC Gasket Factors
Temperature, Max		Gb 557psi (3.8 MPa)
In Air	+850°F (450°C)	a .325
In Steam	+1200°F (650°C)	Gs 2.21psi (0.02 MPa)
pH Range	0-14	

SHAPES

There are many styles of heat exchanger gaskets, most have complicated rib designs or partitions. While some of the most common designs are shown below, Gasket Resources can provide almost any configuration of heat exchanger type gasket utilizing our Durlon CFG technology.

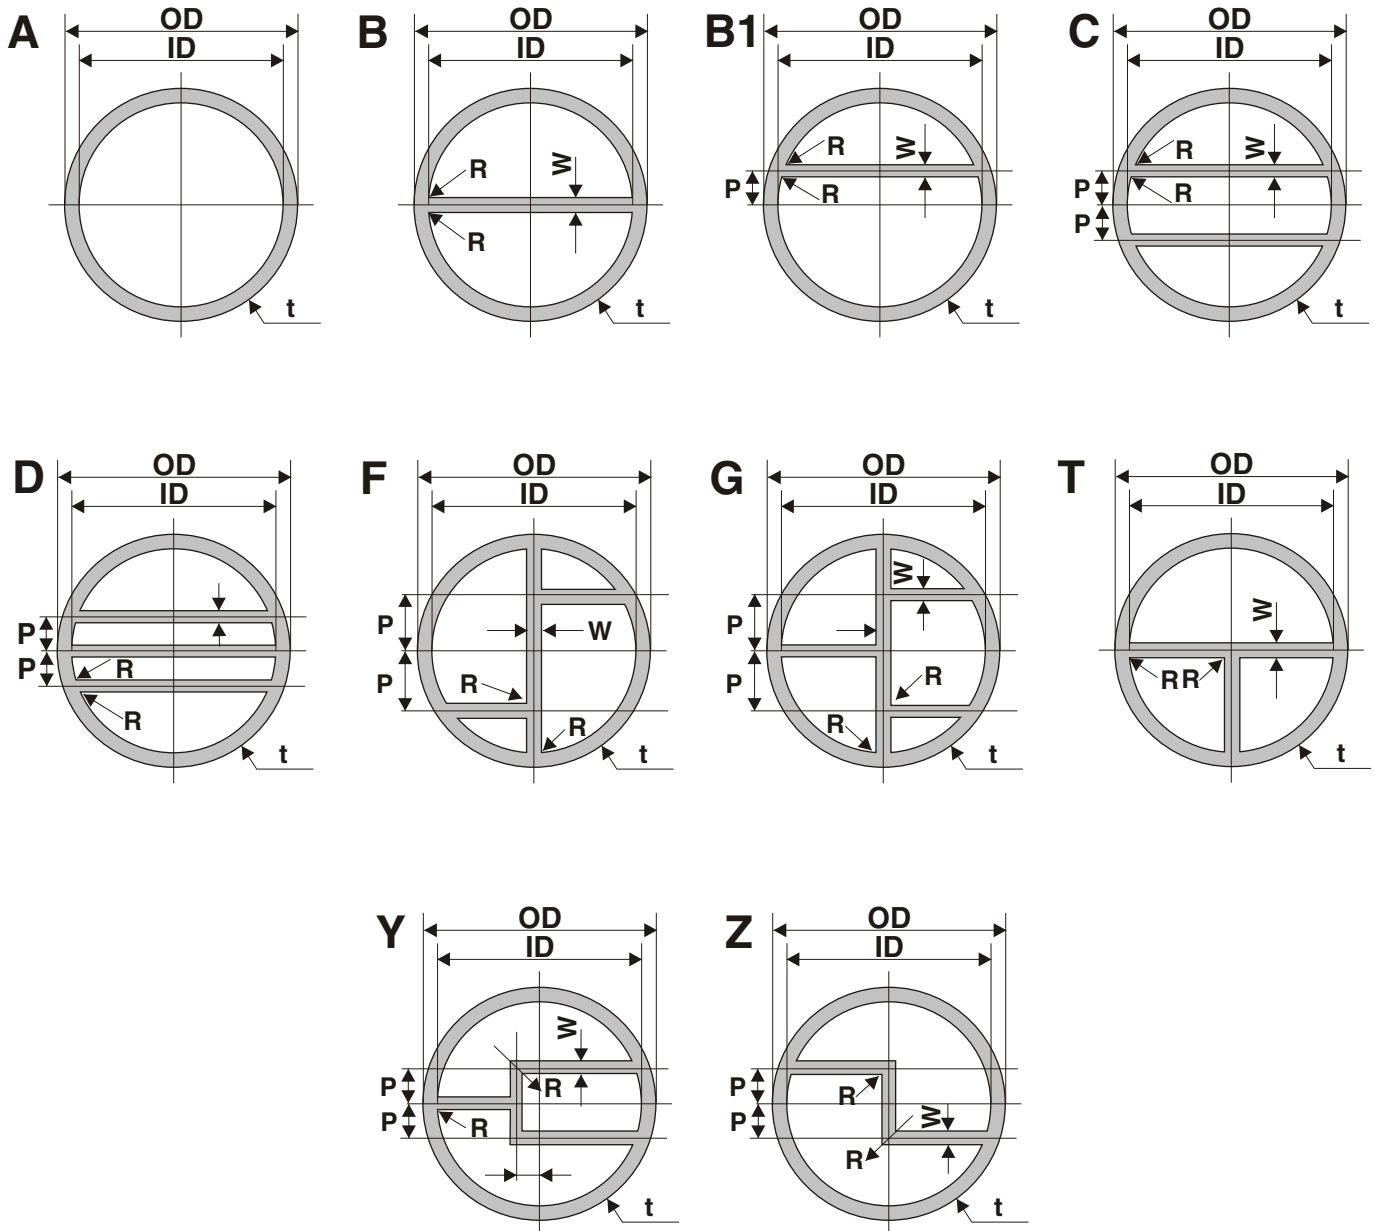

When inquiring and ordering, please specify gasket shape by using the letter to the left of the style of the gasket required as shown above. Along with ID, OD, and thickness, we will require radius (R), flange width (W), and distance from the center of the rib to the center of the gasket (P).